
Equipment replacement

Equipment replacement procedures

The following charts describe equipment replacement procedures used when replacing defective apparatus in QCA144 RPE cabinets.

- [Battery replacement—Procedure 5](#)
- [Expansion QBL24 Battery Unit replacement—Procedure 6](#)
- [Main QBL24 Battery Unit replacement—Procedure 7](#)
- [QUAA3 Power Unit replacement—Procedure 8](#)
- [QUX19 Power Unit replacement—Procedure 9](#)
- [QUX20 Power Unit replacement—Procedure 10](#)
- [Power Distribution Cable replacement—Procedure 11](#)
- [QUA6 Power Fail Transfer Unit \(PFTU\) replacement—Procedure 12](#)
- [QPC705 Converter replacement—Procedure 13](#)
- [QPC706 Power Converter Circuit Pack replacement—Procedure 14](#)
- [QUD24 Cooling Unit replacement—Procedure 15](#)
- [QRF12 Rectifier replacement—Procedure 16](#)
- [Peripheral Equipment Shelf Backplane replacement—Procedure 17](#)

Procedure 5
Battery replacement

CAUTION

Service in the cabinet is interrupted when replacing the batteries.


- 1 Set the AC BRKR breaker on the front of the –48 V rectifier and the CAB INP breaker on the front of the QUX19 unit to OFF.
- 2 Set the DC BRKR breaker on the QBL24 battery units serving the cabinet to OFF.
- 3 Remove the screws securing the cover on the QBL24 battery unit and remove cover.

WARNING

The battery cells are capable of delivering high currents when externally short-circuited. Caution must be used when working near the open terminals of the batteries to ensure that the terminals are not inadvertently short-circuited.

- 4 Disconnect the red and black wires from the + and – terminals to the battery unit (Figure 1).
- 5 With caution, disconnect one at a time the black jumper wires interconnecting the battery packs (Figure 1).
- 6 Remove batteries from QBL24 battery unit.
- 7 Place replacement batteries in QBL24 battery unit.

Figure 1
Battery cell connections

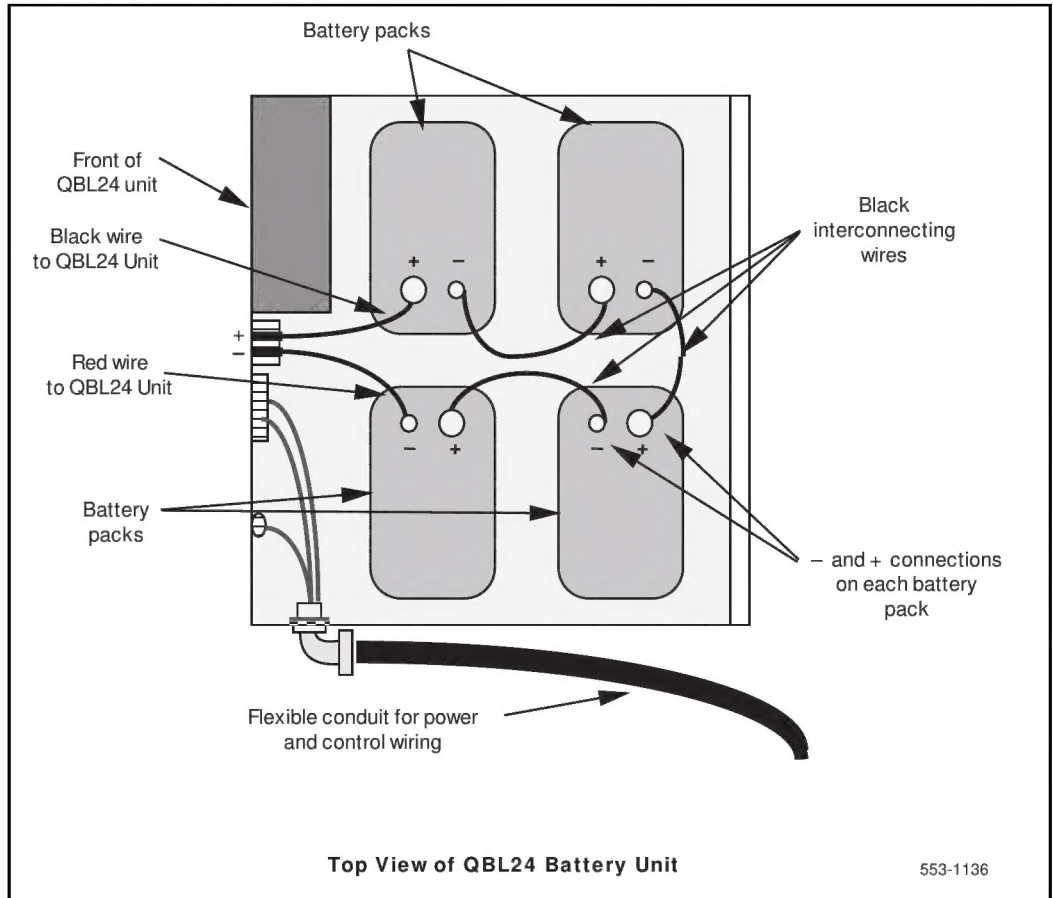

- 8 With three black jumper wires, connect the four battery packs in series (Figure 1). Connect the large lug on the black wire to the terminal of the first battery pack. Connect the small lug on the wire to the negative (–) terminal on the second battery pack. Install the remaining wires between the second and third, and the third and fourth battery packs. Ensure that connections to the battery terminals are secure but do not over-tighten (maximum torque not to exceed 3.95 N.m (35 in./lb.)).
- 9 Connect the black wire inside the QBL24 battery unit to the remaining positive (+) battery terminal, and the red wire to the remaining negative (–) battery terminal.
- 10 Reinstall cover on QBL24 battery unit.
- 11 Set the AC BRKR breaker located on the front –48 V rectifier to ON.
- 12 Set the DC BRKR breaker on the front of the QBL24 battery units to ON.
- 13 Set the CAB INP breaker on the front of the QUX19 or QUX21 unit to ON.

Procedure 6

Expansion QBL24 Battery Unit replacement

CAUTION

Service in the cabinet is interrupted when replacing the expansion QBL24 battery unit.

- 1 Set the AC BRKR breaker on the front of the –48 V rectifier to OFF in the cabinet connected to QBL24 battery unit being replaced.
- 2 Set the DC BRKR breaker on both QBL24 battery units serving the cabinet to OFF.


- 3 Remove the screws securing the cover on the main QBL24 battery unit and remove cover (Figure 2).

WARNING

The battery cells are capable of delivering high currents when externally short-circuited. Caution must be used when working near the open terminals of the batteries to ensure that the terminals are not inadvertently short-circuited.

- 4 Disconnect the red and black wires from the expansion QBL24 battery unit to the front of the main QBL24 unit (Figure 2).
- 5 From the main QBL24 unit, remove the flexible conduit and wiring going to the expansion QBL24 unit (Figure 2).
- 6 Remove batteries from old unit and install in new QBL24 unit as described in Procedure 5 (or install new batteries).
- 7 Install cover on expansion QBL24 unit.
- 8 Install flexible conduit and wiring from expansion QBL24 unit to main QBL24 unit (Figure 2).
- 9 Connect green wire to lug 2, black wire to terminal 1 of W1 and red wire to terminal 5 of TB1 on front panel of main QBL24 unit (Figure 2).
- 10 Install cover on main QBL24 unit.
- 11 Set the AC BRKR breaker located on the front –48 V rectifier to ON in the cabinet connected to the replacement QBL24 battery unit.
- 12 Set the DC BRKR breaker on the front of the QBL24 battery units to ON.

Figure 2
Expansion battery unit connections

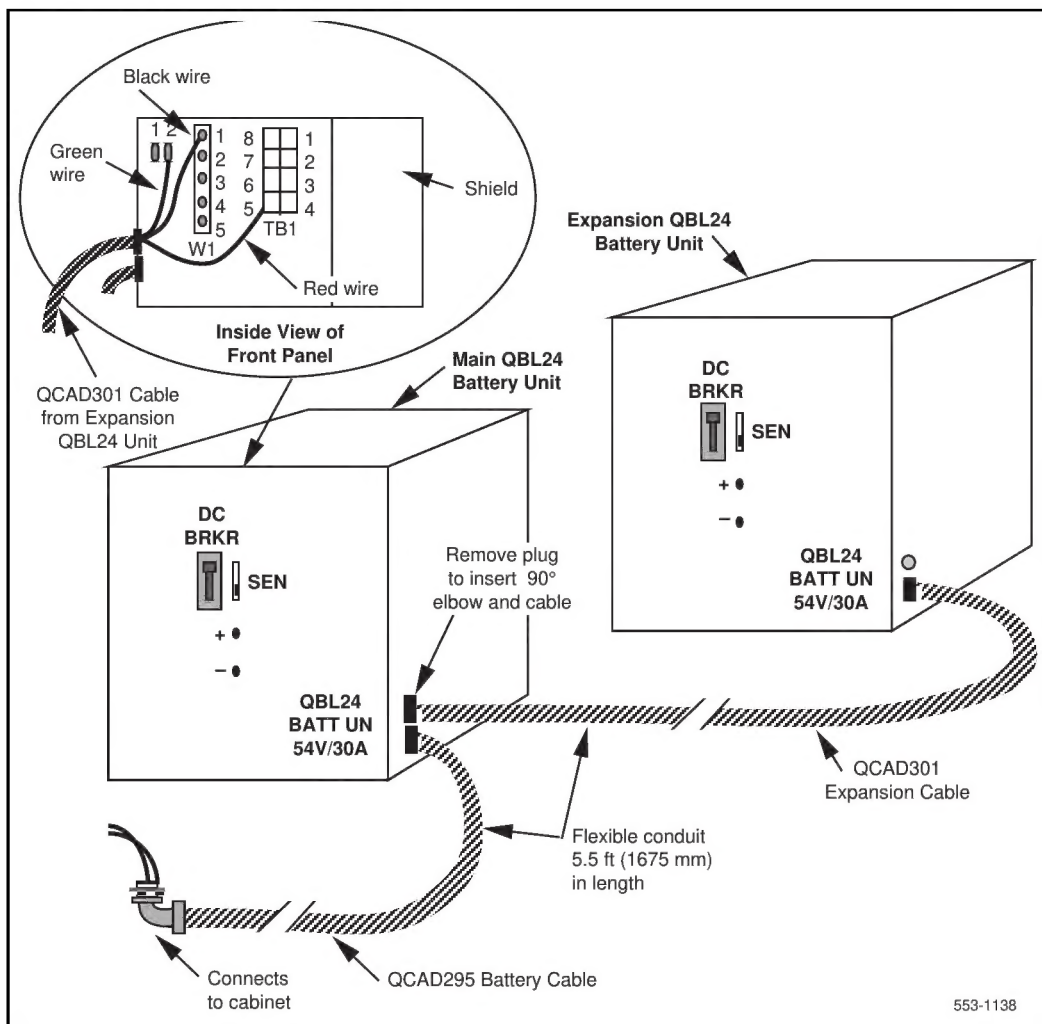


Procedure 7
Main QBL24 Battery Unit replacement**CAUTION**

Service in the cabinet is interrupted when replacing the main QBL24 battery unit.

- 1 Set the AC BRKR breaker on the front of the –48 V rectifier to OFF in the cabinet connected to the QBL24 battery unit being replaced.
- 2 Disconnect the cabinet power line cord from the commercial ac power supply.
- 3 Set the DC BRKR breaker on main and expansion (if equipped) QBL24 battery units serving the cabinet to OFF.
- 4 If cabinet is equipped with EMI shields, remove the bottom shield.
- 5 Disconnect wiring from rear of –48 V rectifier, QUX19 unit and from terminal GRD1A on ground bus to main QBL24 unit (Figure 3). Remove wiring and flexible conduit from cabinet.
- 6 Install flexible conduit and wiring from replacement QBL24 unit and to –48 V rectifier, QUX19 unit and to GRD1 ground bus terminal as shown in Figure 3.
- 7 Reinstall EMI shield (if required).
- 8 If an expansion QBL24 unit is equipped, disconnect from old main QBL24 unit and connect to new main unit as described in Procedure 6.
- 9 Remove batteries from old main QBL24 and install in new main QBL24 unit as described in Procedure 5 (or install new batteries).
- 10 Install cover on main QBL24 unit.
- 11 Reconnect power line cord to commercial ac power supply.
- 12 Set the AC BRKR breaker located on the front –48 V rectifier to ON.
- 13 Set the DC BRKR breaker on the front of the QBL24 battery units to ON.

Figure 3
Connections at rear of cabinet

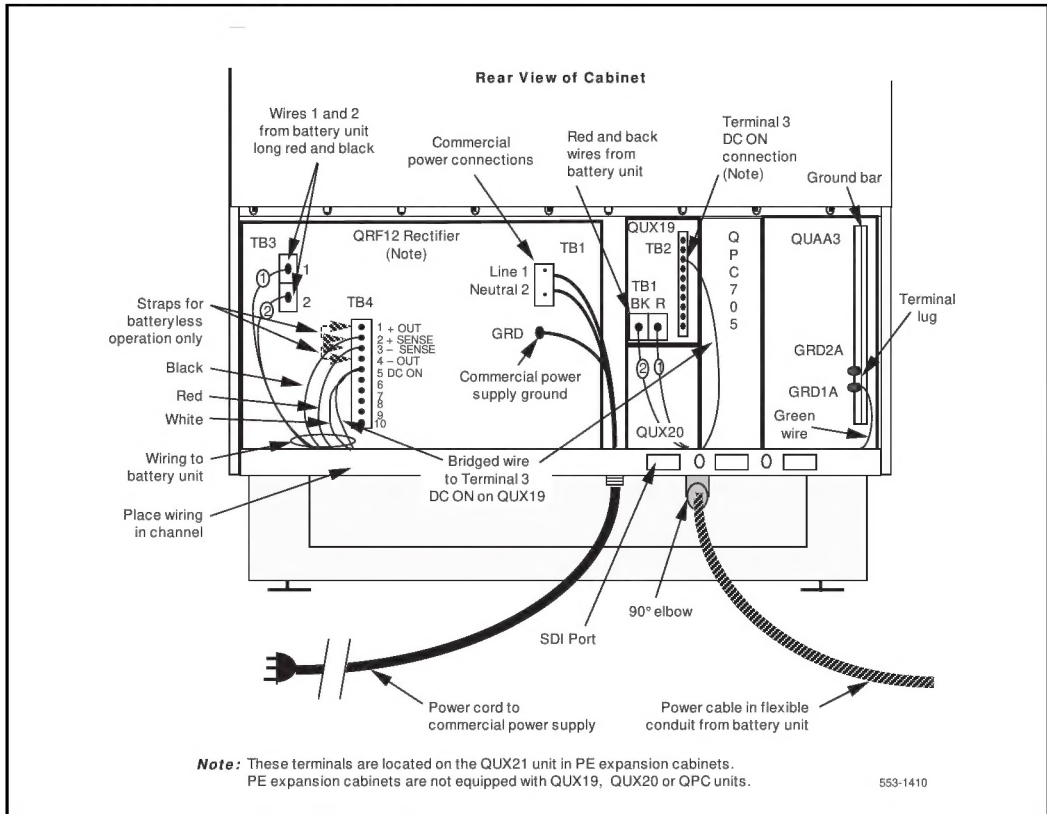

Procedure 8
QUAA3 Power Unit replacement**CAUTION**

Service in the cabinet is interrupted when replacing the QUAA3 power unit.

- 1 Set the AC BRKR breaker on the front of the –48 V rectifier to OFF.
- 2 Set the DC BRKR breaker on the QBL24 battery units (if equipped) serving the cabinet to OFF.
- 3 If cabinet is equipped with EMI shields remove the bottom shield. Remove the two screws at the top corners of the shield and lower shield to disengage from cabinet.
- 4 Tag and disconnect connectors J1, J2, J3, J4, J5, J6, and J7 at rear of QUAA3 unit.
- 5 Tag and disconnect wires from terminals 1, 2, 3, 4, 5, and 6 of TB4 at rear of QUAA3 unit.
- 6 Perform this step only if a QPC705 converter is installed beside the QUAA3 unit. From the front of the cabinet, remove screws securing the QPC705 converter to the cabinet. Slide the QPC705 out of the cabinet and set aside.
- 7 From the front of the cabinet, remove the two bolts securing the right bottom of the QUAA3 unit to the cabinet.
- 8 Remove the two screws securing the left side of the QUAA3 unit to the cabinet and remove unit from cabinet.
- 9 Position the replacement QUAA3 unit in the cabinet and secure to cabinet with mounting screws and bolts.

- 10** If previously removed, reinstall the QPC705 converter and secure to cabinet with mounting screws.
- 11** At the rear of the QUAA3 unit, reconnect connectors J1, J2, J3, J4, J5, J6, and J7.
- 12** On TB4 at rear of QUAA3 unit, reconnect wires to terminals 1, 2, 3, 4, 5, and 6.
- 13** If previously removed, reinstall EMI shield at rear of cabinet and secure with mounting screws.
- 14** Ensure that the 24Hz/20Hz and the LN XFR switches on the front of the QUAA3 unit are correctly set (usually set the same as on the removed QUAA3 unit).
- 15** Set the AC BRKR breaker located on the front –48 V rectifier to ON.
- 16** If cabinet is equipped with QBL24 battery units, set the DC BRKR breaker on the units to ON.


Procedure 9
QUX19 Power Unit replacement**CAUTION**

Service in the cabinet is interrupted when replacing the main QUX19 power unit.

- 1 Set the AC BRKR breaker on the front of the –48 V rectifier to OFF.
- 2 Set the DC BRKR breaker on the QBL24 battery units (if equipped) serving the cabinet to OFF.
- 3 If cabinet is equipped with EMI shields, tag and disconnect cables from all connectors A, B, C, D, E, F, and G at the rear of the cabinet and remove shields.
- 4 Remove screws securing cabinet top assembly (Figure 4).
- 5 With a soldering iron, disconnect wiring from thermostat under cabinet top assembly (Figure 4).
- 6 At the rear of the QUAA3 unit, disconnect cable connectors P1, P5, P6, and P7 and wiring from terminals 1, 2, 3, 4, 5, and 6 of TB4.
- 7 At the rear of the QUX19 unit, tag and disconnect power wiring from TB1 and P10 wiring from TB2.
- 8 From the ground bus at the right rear of the cabinet, disconnect wiring from lugs GRD2A, GRD2G, and GRD1C.
- 9 From the front of the cabinet, remove the screws securing the QUX19 unit to cabinet and remove unit and attached wiring from cabinet.
- 10 Install replacement QUX19 unit and wiring in cabinet and secure with mounting screws.
- 11 From the rear of the cabinet, position the long black and white wires for the thermostat. Connect and solder connections to thermostat (Figure 4).
- 12 Install cabinet top assembly and secure with mounting screws (Figure 4).
- 13 Reconnect power wiring to TB1 and P10 wiring to TB2 at rear of QUX19 unit.

- 14** Connect connectors P1, P5, P6, and P7 from QUX19 unit to connectors J1, J5, J6, and J7 at rear of QUAA3 unit.
- 15** Connect connector PE to connector J on backplanes.
- 16** Connect power wiring harness containing three red wires, two blue wires, and a black wire to TB4 at the rear of the QUAA3 unit as follows:
 - The two 10 AWG red wires to terminals 1 and 2.
 - The two 10 AWG blue wires to terminals 3 and 4.
 - The 14 AWG black wire to terminal 5.
 - The 14 AWG black wire to terminal 6.
- 17** At the cabinet ground bus, connect the remaining wires from the QUX19 unit as follows:
 - Black and yellow wires to terminal GRD2A on one lug.
 - Blue wire to the second lug on terminal GRD2A.
 - One black wire on each lug of terminal GRD2G.
 - One white wire on each lug of terminal GRD1C.
- 18** If previously removed, reinstall EMI shields and reconnect cables at rear of cabinet.
- 19** Set the CAB INP breaker on the front of the QUX19 unit to ON.
- 20** Set the AC BRKR breaker on the front of the –48 V rectifier to ON.
- 21** Set the DC BRKR breaker on the QBL24 battery units (if equipped) serving the cabinet to ON.

Figure 4
Cabinet top assembly

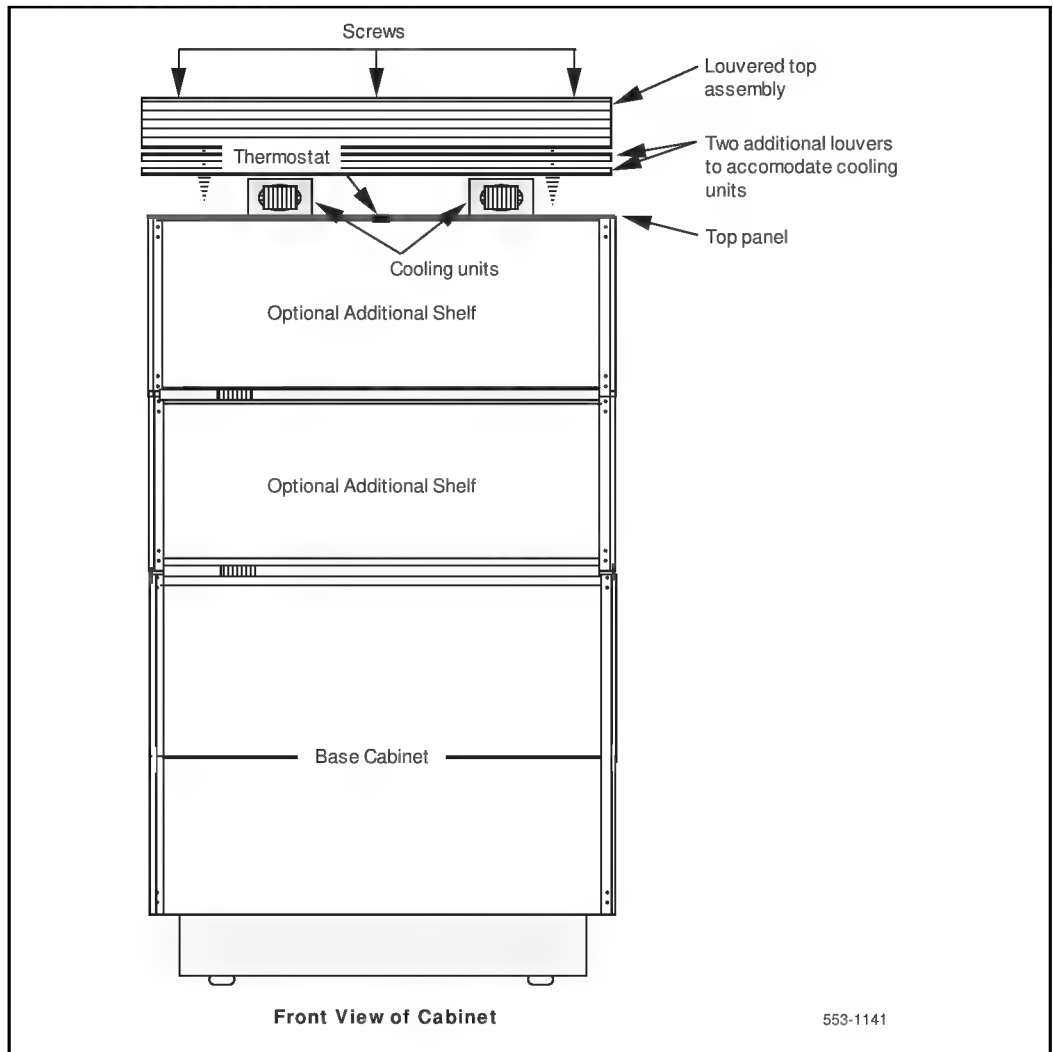

Procedure 10
QUX20 Power Unit replacement

CAUTION

Service in the cabinet is interrupted when replacing the main QUX20 power unit.

- 1 Set the breakers on the faceplate of the QUX20 unit to OFF.
- 2 Set the CAB INP breaker on the QUX19 unit to OFF.
- 3 If equipped, remove the lower EMI shield from the rear of the cabinet.
- 4 From the rear of the cabinet, disconnect the lead equipped with a spade connector from the QUX20 unit to TB3 at rear of the QUX19 unit.
- 5 Tag and disconnect red and blue wires from terminals 2, 3, 4, and 5 (4 and 5 may be spare) of TB5 at rear of QUX20 unit.
- 6 From the front of the cabinet, remove the screws securing the QUX20 unit to the cabinet and remove unit.
- 7 Position replacement QUX20 unit and secure to cabinet with mounting screws.
- 8 From the rear of the cabinet, connect the lead equipped with a spade connector to the terminal at TB3 at the rear of the QUX19 unit.
- 9 Reconnect red and blue wires to terminals 2, 3, 4, and 5 (4 and 5 may be spare) of TB5 at rear of QUX20 unit.
- 10 If required, reinstall EMI shields.
- 11 Set the required breakers on the front of the QUX20 unit to ON.
- 12 Set the CAB INP breaker on the QUX19 unit to ON.

Procedure 11
Power Distribution Cable replacement**CAUTION**

Service in the cabinet is interrupted when replacing a power distribution cable.

- 1 Set the CAB INP breaker on the QUX19 unit to OFF.
- 2 Perform this step only if EMI shields are equipped.
 - Remove screws securing bottom shield and remove shield.
 - Tag and disconnect cables from connectors at rear of the first PE shelf. Remove EMI shield.
 - Tag and disconnect cables from connectors A, B, C, D, E, and F at rear of PE shelf on second tier. Remove EMI shield.
 - If power cable being replaced is connected to the third tier, tag and disconnect cables from connectors A, B, C, D, E, and F of third tier. Remove EMI shield.
- 3 Perform this step only if the power cable serving the first tier is being replaced.
 - Disconnect connector P3 from the rear of the QUAA3 unit.
 - Disconnect red and blue wires from terminals 2 and 3 of TB5 at the rear of the QUX20 unit.
 - Disconnect the black and white wires from the distribution cable to the GRD2 and GRD1 connections on the ground bus at the rear of the cabinet.
 - Disconnect connectors PE2 and PE3 from the PE shelf backplane.
 - Connect connectors PE2 and PE3 of the replacement distribution cable to the PE shelf backplane J connectors and connector P3 and J3 at the rear of the QUAA3 unit.
 - Connect the white and black wires equipped with ring connectors to GRD1 and GRD2 terminals on the ground bus.
 - Connect the red and blue wires to terminals 2 and 3 of TB5 at the rear of the QUX20 unit.

- 4 Perform this step only if the power distribution cable for the third tier is being replaced.
 - Disconnect connector P4 and P7 from the rear of the QUAA3 unit.
 - Disconnect red and blue wires from terminals 4 and 5 of TB5 at the rear of the QUX20 unit.
 - Disconnect the black and white wires from the distribution cable to the GRD2 and GRD1 connections on the ground bus at the rear of the cabinet.
 - Disconnect connectors PE4 and PE5 from the PE shelf backplane.
 - Connect connectors PE4 and PE5 of the replacement distribution cable to the PE shelf backplane J connector and connectors P4 and P7 to J4 and J7 at the rear of the QUAA3 unit.
 - Connect the white and black wires equipped with ring connectors to GRD1 and GRD2 terminals on the ground bus.
 - Connect the red and blue wires to terminals 4 and 5 of TB5 at the rear of the QUX20 unit.
- 5 Reinstall EMI shields and secure with mounting screws.
- 6 Reconnect all cables previously disconnected.
- 7 Set the CAB INP breaker on the QUX19 unit to ON.

Procedure 12

QUA6 Power Fail Transfer Unit (PFTU) replacement

- 1 Place temporary jumpers at cross-connect terminal to maintain service on telephones involved with the QUA6 unit.
- 2 Remove and tag cable from connector J1 on the faceplate of the QUA6 unit.
- 3 Remove screws securing QUA6 unit to wall (if mounted on wall) and remove unit.
- 4 With mounting screws, mount replacement QUA6 unit.
- 5 Reconnect cable to connector J1 on the faceplate of the QUA6 unit.
- 6 Remove temporary jumpers at cross-connect terminal.

Procedure 13
QPC705 Converter replacement**CAUTION**

Service in the cabinet is interrupted when performing step 1.

- 1 Set the CAB INP breaker on the QUX19 power distribution unit to OFF.
- 2 Remove the screws securing the QPC705 converter to the cabinet.
- 3 Slide the QPC705 converter out of its position and disconnect the QCAD278 power cable from the connector at the rear of the converter.
- 4 Perform this step only if the QCAD278 cable is being replaced.
 - Remove the screws securing the lower EMI shield (if equipped) at the rear of the cabinet and remove shield.
 - Disconnect the QCAD278 cable from terminal 2 of TB2 on the QUX19 unit, connector P2 at the rear of the QUAA3 unit and from the lug on the ground bus.
 - Remove cable.
- 5 If QPC705 is being replaced, connect existing QCAD278 cable to connector on rear of new QPC705 converter.

If the QCAD278 cable is being replaced, connect connector 705 of new cable to connector at rear of existing QPC705 converter.
- 6 Install the QPC705 in its assigned position with the QCAD278 cable towards the rear of the cabinet. Secure the QPC705 converter to the cabinet with mounting screws.
- 7 Perform this step only if the QCAD278 power cable is being replaced.
 - Connect connector P2 of the QCAD278 cable to connector P2 at the rear of the QUAA3 unit.
 - Connect the red wire equipped with a spade connector to terminal 2 of TB2 at the rear of the QUX19 unit.
 - Connect the black wire equipped with a ring connector to GRD2 terminal on the ground bus at the rear of the cabinet.
 - Reinstall the EMI shield at rear of cabinet and secure with mounting screws.


Procedure 14
QPC706 Power Converter Circuit Pack replacement

CAUTION

The appropriate breaker must be OFF before attempting to replace a QPC706 converter pack. See **Figure 5** for breaker assignments.

- 1 See 553-2301-511 and load overlay 32 and disable loops on shelf containing the QPC706 converter.
- 2 Set the ENB/DIS switch on the QPC659 circuit pack on the PE shelf containing the QPC706 converter to DIS.
- 3 Set the PE breaker corresponding to the PE shelf on the QUX20 unit to OFF (**Figure 5**).
- 4 Remove the QPC706 converter and install replacement.
- 5 Set the corresponding PE breaker on the QUX20 unit to ON.
- 6 Set the ENB/DIS switch on the QPC659 circuit pack on the PE shelf to ENB.
- 7 Using overlay program 32, enable loops previously disabled.

Figure 5
Shelf assignments

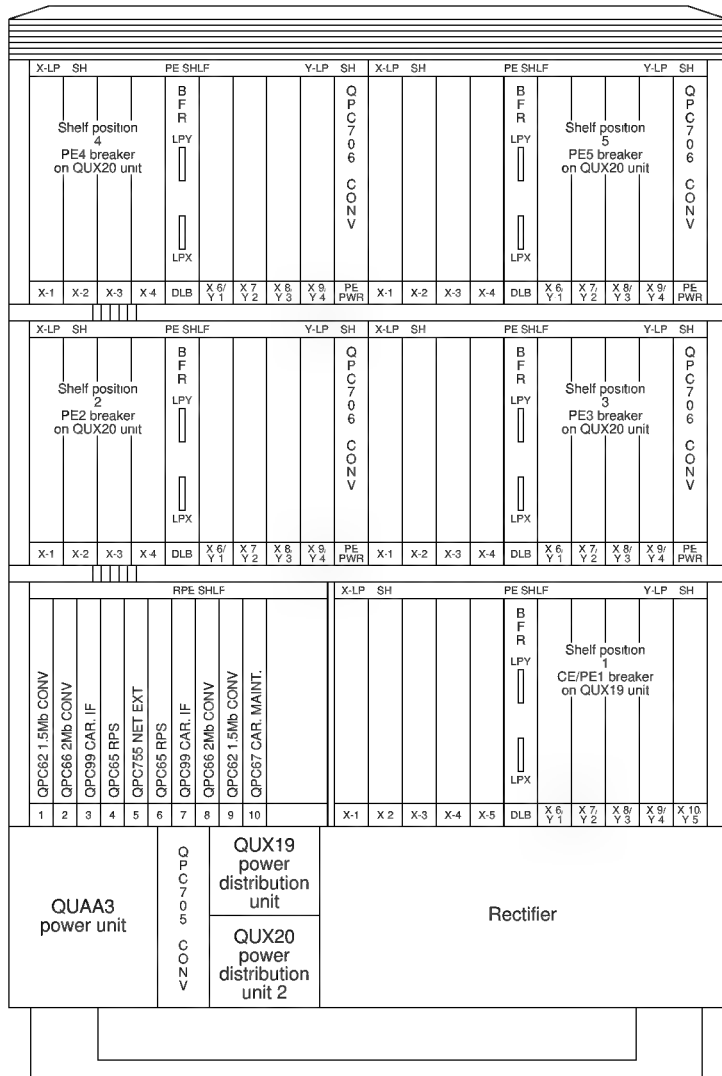


553-6107

Procedure 15
QUD24 Cooling Unit replacement

Note: QUD24 cooling units are located in the cabinet top panel assembly. Connections given in this chart are typical and may vary from one installation to another. Cooling units are connected in series.

- 1 Remove the six screws securing the cabinet top panel assembly and remove top (Figure 4).
- 2 Disconnect cable from P1 connector of QUD24 unit (Figure 6).
- 3 Disconnect the cable or terminating plug (whichever is equipped) from connector P2 of the QUD24 unit (Figure 6).
- 4 Remove mounting screws securing QUD24 unit to cabinet top panel (Figure 6) and remove QUD24 unit.
- 5 Unpack and inspect the replacement QUD24 cooling unit.
- 6 Install replacement QUD24 unit and secure to cabinet top panel with mounting screws (Figure 6).
- 7 Reconnect cable to connector P1 of the QUD24 cooling unit (Figure 6).
- 8 Reconnect cable or terminating plug (removed from previous QUD24 unit) to connector P2 of the QUD24 unit (Figure 4).
- 9 Reinstall cabinet top assembly and secure with mounting screws (Figure 4).

Figure 6
Cooling unit connections

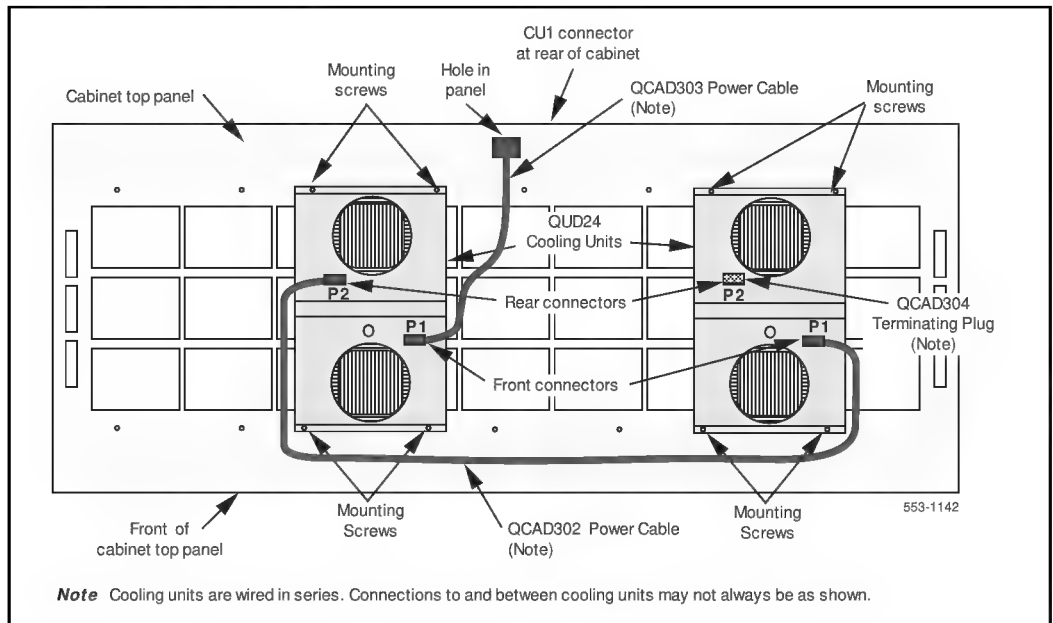

Procedure 16
QRF12 Rectifier replacement

CAUTION

Service in the cabinet is interrupted when replacing the rectifier unless battery backup is provided.

- 1 Set AC BRKR breaker on the front of the rectifier to OFF.
- 2 Disconnect rectifier commercial power line cord from its receptacle.
- 3 If equipped, remove the bottom EMI shield.
- 4 Tag and disconnect the commercial power line cord, sense leads, DCON lead and battery leads from the rear of the rectifier (Figure 3).
- 5 Remove the mounting screws at the front of the rectifier and remove the rectifier from cabinet.
- 6 Position the new rectifier in the cabinet and secure with mounting screws.
- 7 Set the ac breaker on the new rectifier to OFF.
- 8 Reconnect all previously disconnected wiring (Figure 3).
- 9 Ensure that the 110V/220V switch on the front of the new rectifier is set to the correct voltage.
- 10 Connect the rectifier commercial power line cord to its receptacle.
- 11 Set the rectifier AC BRKR breaker on the front rectifier to ON.

Procedure 17**Peripheral Equipment Shelf Backplane replacement**

- 1 Log in to the system and load overlay program 32 as described in 553-2301-511.
- 2 Disable the PE shelf being replaced using command DISS 1 s, where 1 is the loop number and s is the shelf number.

Note: If the loop is extended to a second PE shelf, that shelf must also be disabled.
- 3 If the backplane being replaced is located on the same level as the RPE shelf in the first tier (base) of the cabinet, remove the PE1 fuse from the QUX19 power unit.

If the backplane being replaced is located in shelf positions 2 through 5, set the corresponding PE breaker (PE2, PE3, PE4, or PE5).
- 4 If the backplane being replaced is in positions 2 through 5 and the cabinet is equipped with EMI shields, tag and disconnect cables from connectors A, B, C, D, E, and F on the back of the shelf next to the backplane being replaced.
- 5 If the cabinet is equipped with EMI shields, remove the screws securing the shield behind the backplane being replaced.
- 6 Disconnect power cable from connector J on the backplane being replaced.
- 7 Unseat all circuit packs from backplane being replaced.
- 8 Remove the hex screws securing the top and bottom of the backplane to the cabinet and remove backplane.
- 9 Position the new backplane and secure to cabinet with hex screws.
- 10 Reconnect power cable to connector J on backplane.

- 11** If previously removed, reinstall EMI shield and secure to cabinet with mounting screws.
- 12** Reconnect all cables previously disconnected from connectors on shelf backplanes.
- 13** Reinsert all circuit packs previously unseated.
- 14** Reinsert PE1 fuse (if removed) on QUX19 unit or set PE breaker on QUX 20 unit for replaced backplane to ON.
- 15** With overlay program 32 (see 553-2301-511) enable the previously disabled shelves by entering command ENLS 1 s, where 1 is the loop and s is the shelf number.
- 16** Enter **** to abort overlay program 32.
- 17** To test replacement PE shelf, load overlay program 30 (NWS).
- 18** Enter command LOOP 1, where 1 is the loop number on which the shelf was replaced.
- 19** If the system response is other than OK, refer to the trouble indicators documented in this practice.

Meridian 1

QCA144 1.5 MB/S Remote

Peripheral Equipment

Cabinet Appendix A

Maintenance and equipment
replacement

© 1987,1994 Northern Telecom

All rights reserved

Information is subject to change without notice.

Northern Telecom reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant. This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC rules.

SL-1 and Meridian 1 are trademarks of Northern Telecom.

Publication number: 553-2601-500A

Document release: Standard 2.0

Date: December 1994

Printed in the United States of America